


PRIKAZANO JE OKNO ACRYAL 900X550 NA RAVNI STENI. (ACRYAL window 900x550 on a flat wall is shown.)
OKNA SE RAZLIKUJEJO OD PRIKAZANEGA GLEDE NA NAZIVNO DIMENZIJO IN IZBRANO KONFIGURACIJO. ŠTEVILKA ARTIKLA IN LISTA REZERVNIH DELOV STA NA VOLJO PO KONFIGURACIJI OKNA.
(Windows differ from the drawing depending on nominal size and chosen configuration. Part number and spare parts list are available after window cofiguration.)
PRIKAZANE KOMPONENTE SO NAPRODAJ LOČENO. PRED PRIČETKOM MONTAŽE OKNA SE PREPRIČAJTE, DA IMATE VES POTREBEN MATERIAL.
(Components shown are sold separately. Please make sure you have all the necessary materials before you begin installation.)
SESTAVA NA VOZILU. ZA PODROBEN POSTOPEK PREBERITE NAVODILA ZA VGRADNJO. (Assembly on vehicle. Read installation instructions for the detailed process.)

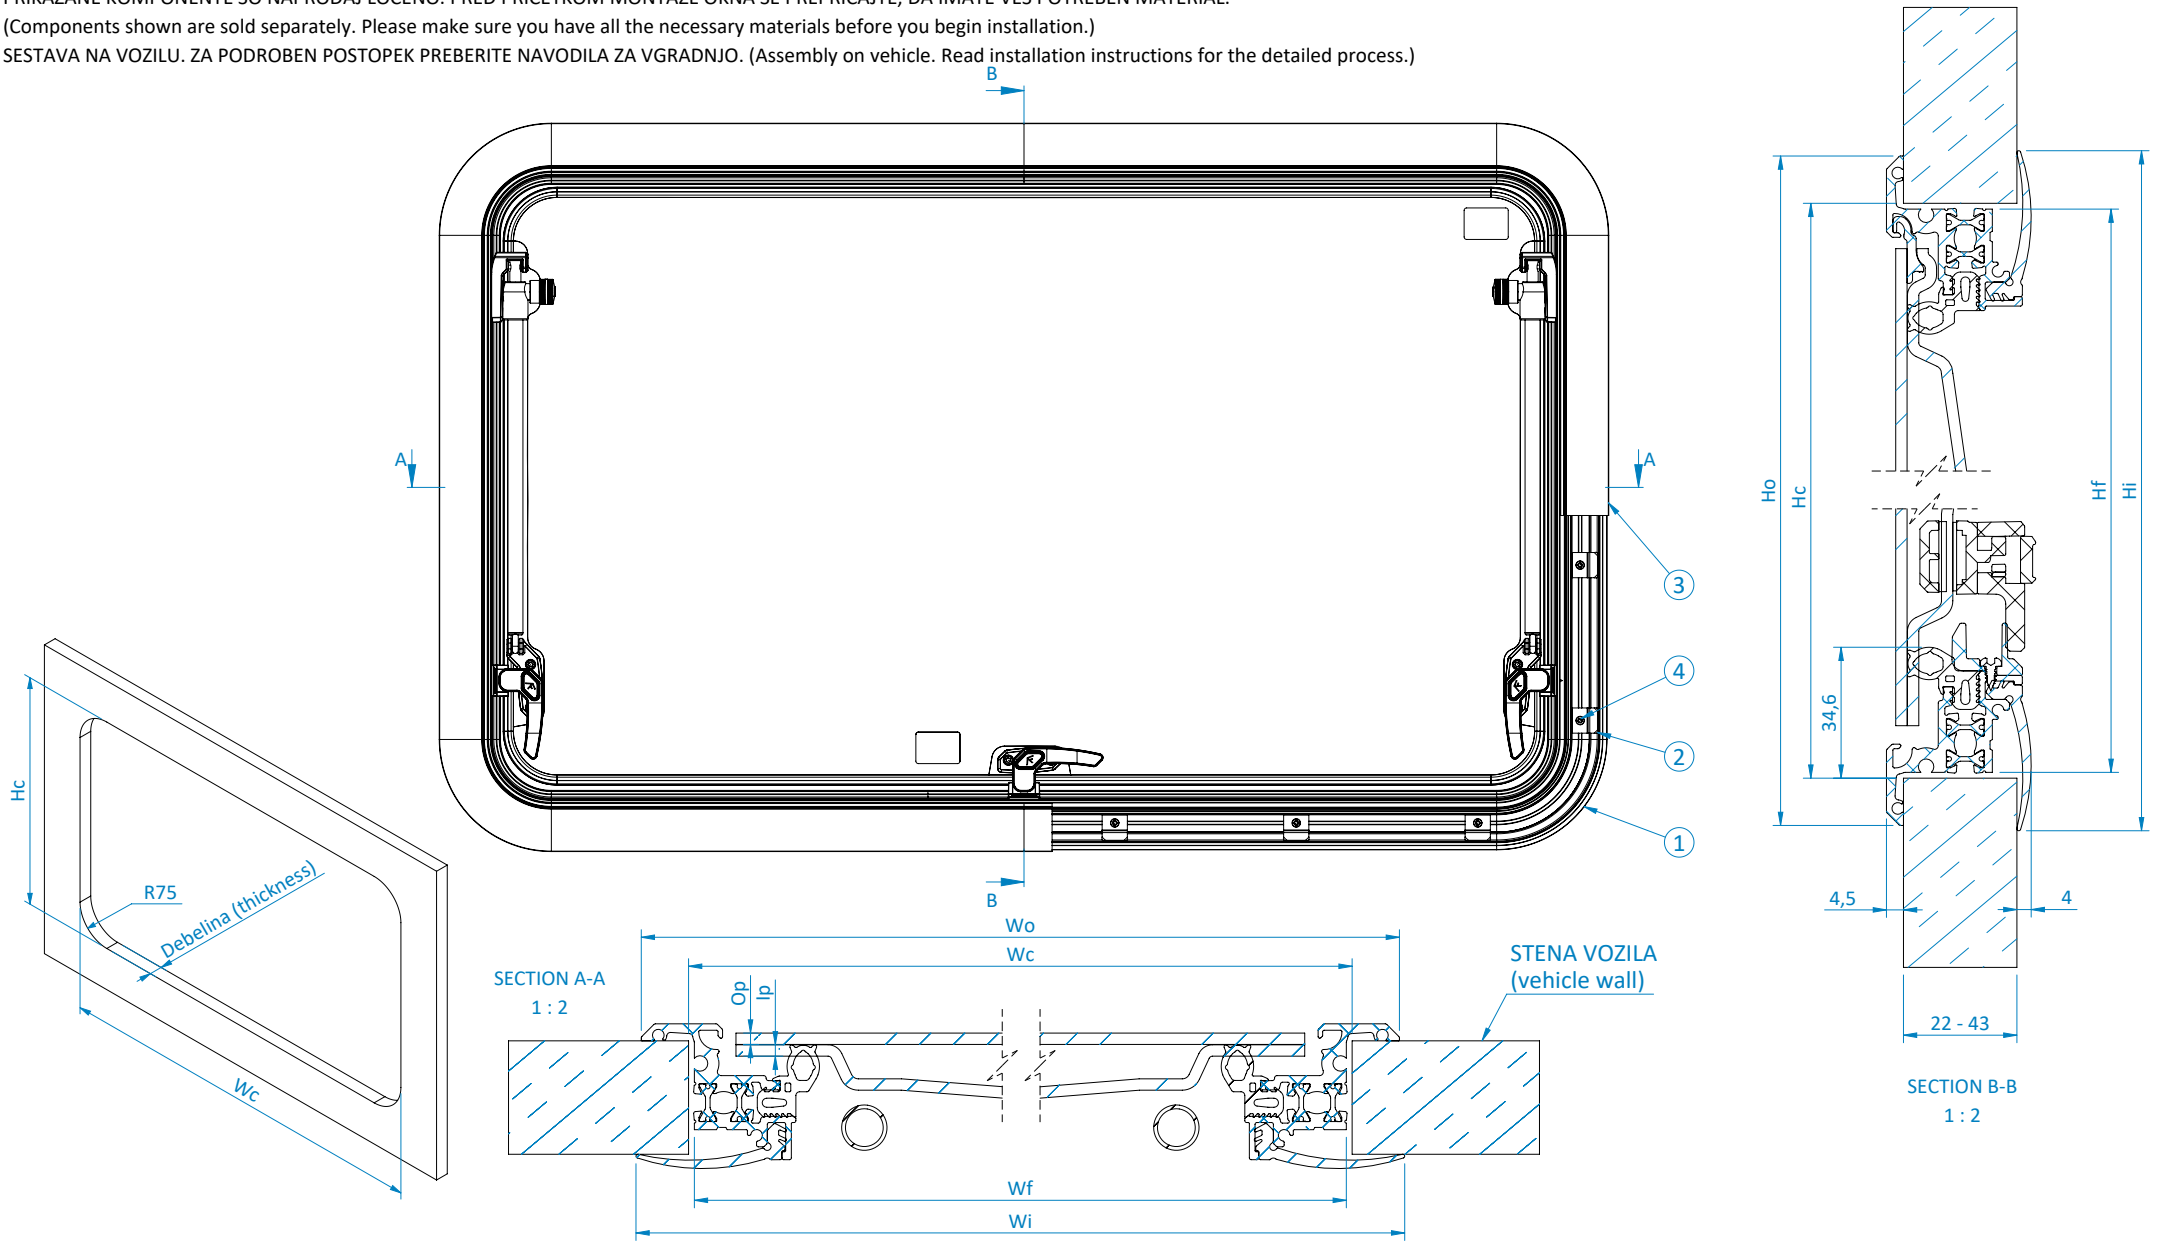

ITEM NO.	DESCRIPTION
1	UO ACRYAL OKNO (ACRYAL window)
2	PRITRDILO (fastening clip)
3	AMBIENTALNI TRAK (ambiental strip)
4	PRITRDLILNI VIJAK (fastening screw)

**ACRYFORM**

Acryform d.o.o.
Kladje nad Blanco 35; 8283 Blanca; Slovenija
www.acryform.com

Description	Revision
PRODUCT DRAWING - SERIES ACRYAL	V5
Drawing no. 0005 01X01 KPL	Sheet format A4
Date of revision 21.10.2026	

Copyright: Without prior consent of Acryform d.o.o. this technical document must not be copied, duplicated or transmitted in any manner to a third party. This document and the information contained therein are confidential and property of Acryform d.o.o. (protection according to DIN ISO 14014 claimed). Acryform d.o.o. reserves the right to modify this drawing without prior notification. Unless stamped and signed this is an uncontrolled copy and will not be updated. You are responsible for ensuring you have the latest issue. Dimensions without tolerances are informative and non-binding.

NAZIVNA DIMENZIJA Nominal size			ODPRTINA NA STENI Wall cut-out +1,5/-0		VGRADNA DIMENZIJA OKVIRJA Frame installation dim. ±1		NOTRANJA DIMENZIJA Inside strip		ZUNANJI OKVIR Outside frame		DEBELINA STEKLA Glazing thickness		KOT ODPIRANJA Opening angle +0/-3	ŠT. PRITRDIL IN VIJAKOV No. mounting brackets and screws	DOLŽINA AMBIENT. TRAKU Ambiental strip length [m]	INFO. TEŽA Info. weight [kg]	ZASILNI IZHOD Emergency exit EN 1645-1 EN 1646-1
			Wc	Hc	Wf	Hf	Wi	Hi	Wo	Ho	Op	Ip					
1	900 x 550	FLAT	900	550	897	547	928	578	925	575	3	3	75°	20	2,7	5,8	✓
2	750 x 465	R5000	750	465	747	462	778	493	775	490				18	2,2	4,6	
3	850 x 550	FLAT	850	550	847	547	878	578	875	575				20	2,6	5,5	✓
4	500 x 300	FLAT	500	300	497	297	528	328	525	325				12	1,4	2,2	
5	550 x 550	FLAT	550	550	547	547	578	578	575	575				16	2,0	3,8	
6	300 x 450	R5000	300	450	297	447	328	478	325	475			66°	10	1,3	2,1	
7	818 x 315	R5000	818	315	815	312	846	343	843	340			75°	18	2,1	4,0	
8	490 x 500	R5000	490	500	487	497	518	528	515	525			66°	14	1,8	3,3	
9	700 x 400	FLAT	700	400	697	397	728	428	725	425				18	2,0	3,7	
10	1200 x 600	FLAT	1200	600	1197	597	1228	628	1225	625			75°	20	3,4	8,0	✓
11	960 x 450	R5000	960	450	957	447	988	478	985	475			66°	18	2,6	5,3	
12	280 x 380	R5000	280	380	277	377	308	408	305	405				10	1,1	1,7	

TEŽA PODSKLOPOV Weight of subassemblies		
	OPIS Description	TEŽA Weight
	PRITRDILO <i>Mounting bracket</i>	3,9g/pc
	VIJAK PRITRDILO <i>Screw for mounting bracket</i>	<1g/pc
	AMBIENTALNI TRAK <i>Ambiental strip</i>	200g/m(length)